



NOTES:

1. HAND HOLE COVER SHALL BE SECURED BY 2 BOLTS (TOP AND BOTTOM).
2. POLE GROUND SHALL BE 1/2" DIA. NC TAPPED HOLE SHALL BE MOUNTED TO SIDE.
3. HAND HOLE SHALL BE ORIENTATED SO THAT IT IS 180° OPPOSITE MAST ARM.

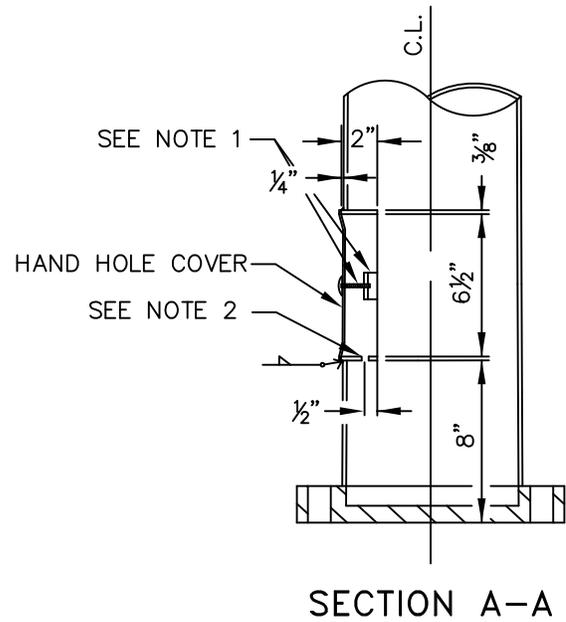

SIGNATURES  
ON FILE

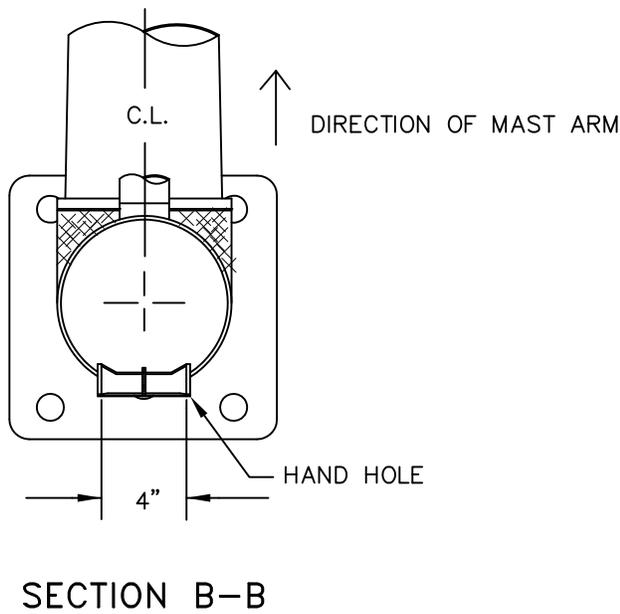

CITY OF GLENDALE  
TRAFFIC SIGNAL AND ITS STANDARDS  
HAND HOLE DETAIL

REVISION:  
4/2013  
T5-10