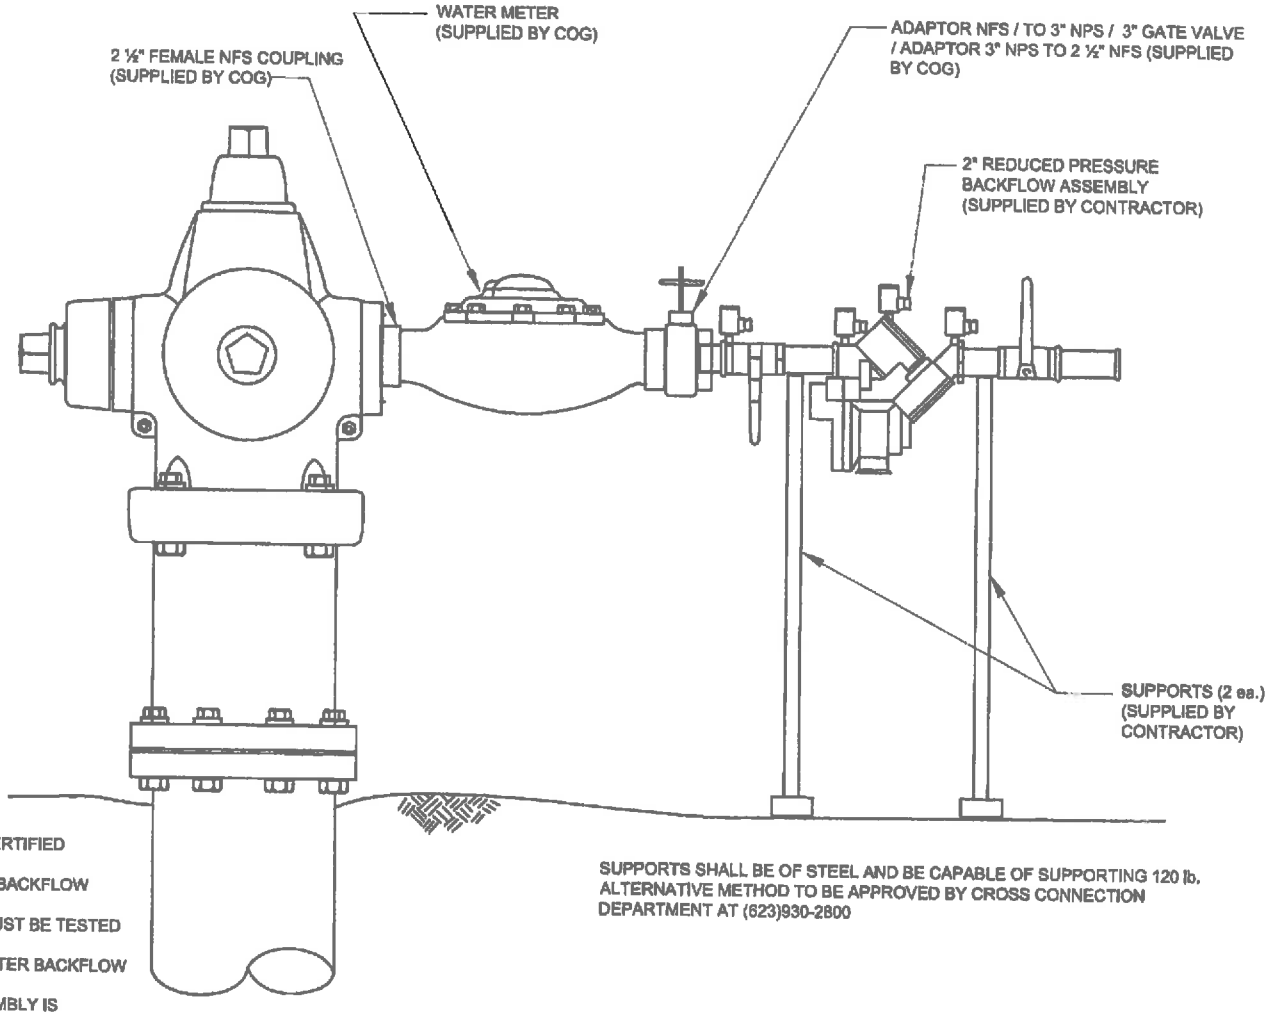

SUPPORTS SHALL BE OF STEEL AND BE CAPABLE OF SUPPORTING 120 lb. ALTERNATIVE METHOD TO BE APPROVED BY CROSS CONNECTION DEPARTMENT AT (623)930-2800

GENERAL NOTES:

1. CONTACT CITY OF GLENDALE FOR LATEST LIST OF APPROVED CERTIFIED TESTERS.
2. CONTRACTOR MUST INSTALL A REDUCED PRESSURE PRINCIPLE BACKFLOW PREVENTION ASSEMBLY (RP) IMMEDIATELY.
3. AFTER THE HYDRANT METER IS SET. BACKFLOW ASSEMBLIES MUST BE TESTED BY A CERTIFIED TESTER PRIOR TO USE.
4. AN INSPECTION BY THE CITY IS REQUIRED FOR ALL HYDRANT METER BACKFLOW PREVENTION ASSEMBLIES PRIOR TO USE.
5. EACH TIME THE HYDRANT METER BACKFLOW PREVENTION ASSEMBLY IS RELOCATED IT MUST BE TESTED.
6. CONTRACTOR WILL BE BILLED TO REPLACE & INSTALL ANY PARTS NOT RETURNED WITH HYDRANT METER.

CITY OF GLENDALE STANDARD DETAIL		REDUCED PRESSURE PRINCIPLE BACKFLOW PREVENTION ASSEMBLY FOR HYDRANT METERS	
APPROVED BY: CITY ENGINEER	David D. Beard, P.E.	DATE : 9/15/2014 REVISED: MARCH 2014	DETAIL NO. G-667