



# ADA Parking Striping Detail

DETAIL #: **SS-205**


City of Glendale  
Transportation Department  
6210 W. Myrtle Ave  
Glendale, AZ 85301  
www.glendaleaz.com  
NOT TO SCALE


- Locate ADA spaces so as to provide the most convenient access to the facility for the user(s) of the space(s).
- See City of Glendale 2015 Engineering Design & Construction Standards section 9.33 "Handicap Parking Facilities" for ADA construction details.
- ADA striping shall be 4" white or yellow paint. Yellow is preferred.
- ADA spaces shall be 11' wide with 5' path or 8' wide with 8' path (total of 16' width minimum for the van accessible space).
- ADA spaces shall be a minimum of 18.5' deep with a 1.5' overhang (20' total length) that does not encroach onto pedestrian accessible route.
- ADA painted symbols shall be located at the end of the accessible spaces. Symbols shall be paint or sticker/tape only.
- R7-8AZ and R7-8P signs shall be installed at 5' to 6' height to the bottom of the sign assembly. See Standard SS-105.
- Covered parking shall be considered independent from uncovered parking. ADA requirements for both conditions will be treated separately.

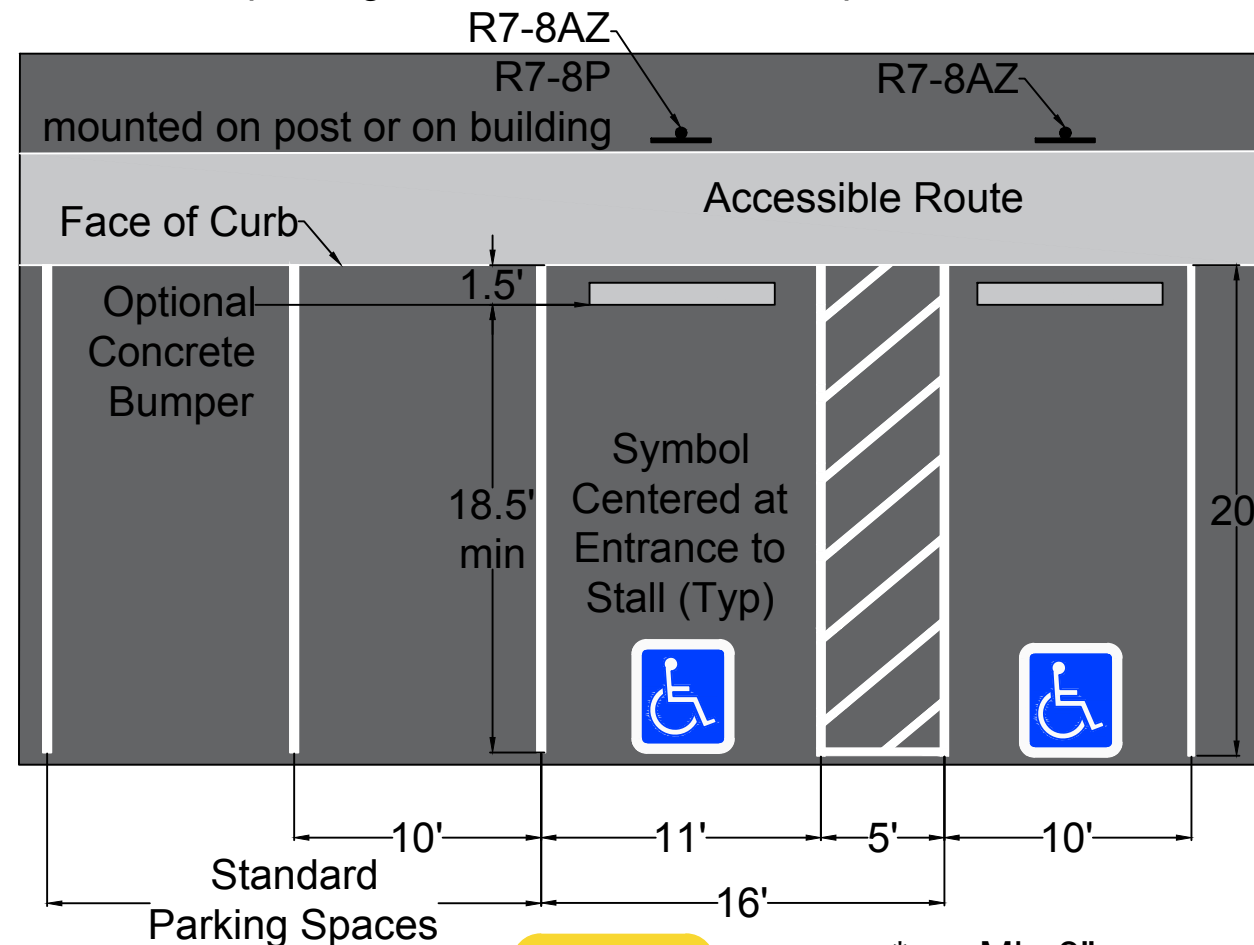

\* = Min 3"  
Special 4"  
A = Min 24"  
Special 36"

B = Min 28"  
Special 41"

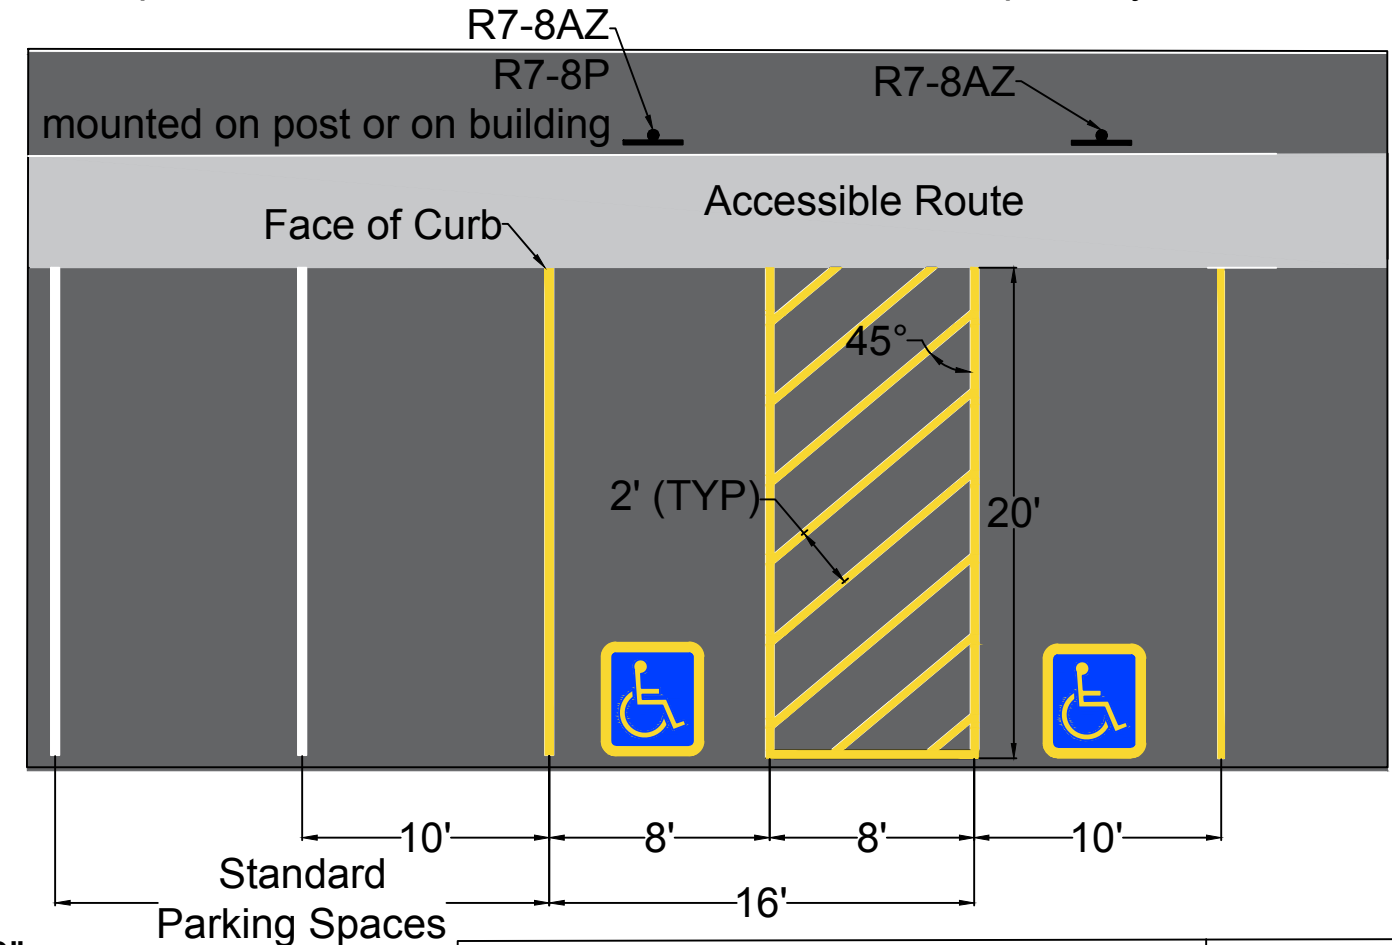

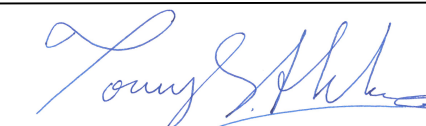ADA Parking Striping Detail		DETAIL # <b>SS-205</b>
APPROVED BY: CITY TRAFFIC ENGINEER		DATE: 06 / 2025